


KNX AREA / LINE COUPLER

Safety instructions

 Electrical devices may only be mounted and connected by electrically skilled persons.

Serious injuries, fire or property damage possible. Please read and follow manual fully.

These instructions are an integral part of the product, and must remain with the end customer.

Device components

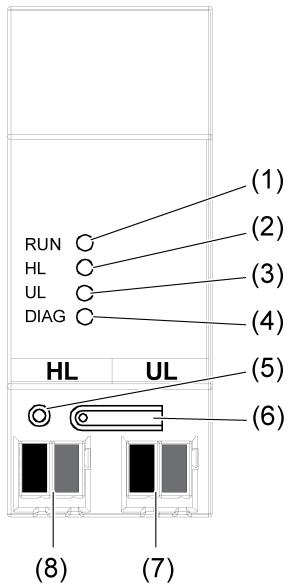


Figure 1

- (1) Operation LED, green
- (2) LED yellow, data reception on higher-order line (HL)
- (3) LED yellow, data reception on subordinate line (UL)
- (4) Diagnostic LED, red
- (5) Programming LED, red
- (6) Programming button
- (7) Device connection terminal for subordinate line (UL)
- (8) Device connection terminal for higher-order line (HL)

Function of diagnostic LED ("DIAG"), red

LED off: Telegrams are filtered or blocked (both directions)
 LED on: Telegrams are transmitted unfiltered (at least one direction)

Function of operation LED ("RUN"), green

LED off: Device off, no power on higher-order line
 LED on: Device on, voltage on both lines
 LED flashing: No voltage on subordinate line

Function

System information

This device is a product of the KNX system and complies with the KNX directives. Detailed technical knowledge obtained in KNX training courses is a prerequisite to proper understanding.

The function of this device depends upon the software. Detailed information on loadable software and attainable functionality as well as the software itself can be obtained from the manufacturer's product database. Planning, installation and commissioning of the device are carried out with the aid of KNX-certified software. The latest versions of product database and the technical descriptions are available on our website.

Intended use

- Establishes a data link between two KNX lines and ensures electrical separation between these lines
- To be operated by addressing as a line coupler, backbone coupler, or amplifier
- Installation in small distribution board on a DIN rail according to EN 60715

Application areas

Line coupler LK: Phys. address X.Y.0
 Connection of a line with a main line (HL). Alternatively with or without filter function. The coupler is logically assigned to the subordinate line.

Backbone coupler BK: Phys. address: X.0.0
 Connection of a main line (HL) with a backbone line (BL). Alternatively with or without filter function. The coupler is logically assigned to the subordinate line.

Amplifier V: Phys. address X.Y.Z
 Preparation and repetition of telegrams on a line, no filter function. Division of a line into max. 4 independent line segments => max. 3 line amplifiers connected in parallel per line (FIGURE 3). Each line segment requires a separate power supply (SV) including choke (DR).

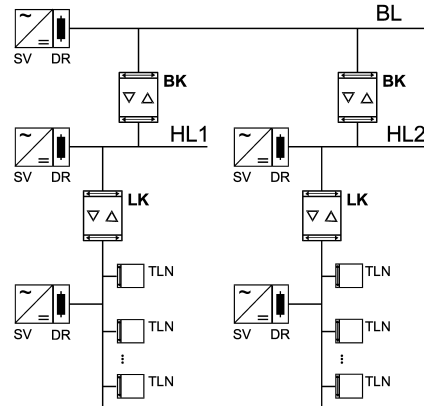


Figure 2: Use as a backbone and line coupler (BK and LK)

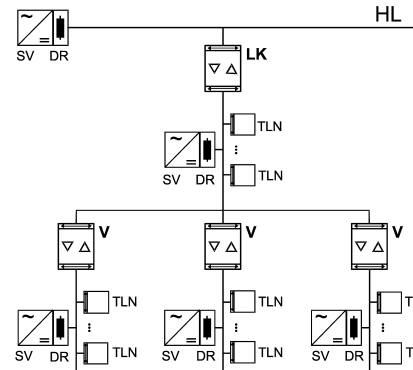


Figure 3: Use as a line coupler (LK) and amplifier (V)

TLN = Bus device

DR = Choke

SV = KNX power supply

Each line requires a separate power supply.

Information for electrically skilled persons



Mortal danger of electric shock.

Cover up live parts in the installation environment.

Fitting and electrical connection

Mounting and connecting the device

- o Mount device on DIN rail with the terminals facing downwards, facing downwards.
- i Use only cables which are approved for KNX.
- o Connect the higher-order line to the left device connection terminal (8). Power is supplied to the device via this terminal.
- o Connect the subordinate line to the right device connection terminal (7).

Commissioning

Loading the physical address and application software

- o Switch on the bus voltage.
- o Press the programming button (6). The programming LED (5) lights up.
- o Assign physical address.
- o Write the physical address on the device label.
- o Load the application program into the device.



KNX AREA / LINE COUPLER
 Art. No. WRKT21025NC

Operating instructions



Panasonic Life Solutions Elektrik San.ve Tic. A.Ş.
 Abdurrahmangazi Mah. Ebubekir Cad. No: 44
 34887 Sancaktepe / Istanbul / Turkey
 T: 0(216) 564 55 55 F: 0(216) 564 55 44

HOTLINE
444 8456

Istr.panasonic.com

Appendix

Technical data

Rated voltage KNX	DC 21 ... 30 V SELV
Current consumption	
higher-order line	approx. 6 mA
subordinate line	approx. 8 mA
Protection class	III
Connection mode KNX	Standard device connection terminal
Ambient conditions	
Ambient temperature	-5 ... +45 °C
Storage/transport temperature	-25 ... +70 °C
Fitting width	36 mm / 2 module
Weight	90 g

Warranty

The warranty follows about the specialty store in between the legal framework as provided for by law.