B.E.G. LUXOMAT® net



BIP4-KNXs REG

Prod.No. 90412 EAN: 4007529904129

Compact binary input with 4 channels for controlling luminaires, blinds, etc

KNX Secure ready

Galvanically isolated inputs for potential-free contacts

Order data

Designation	Colour	Art.No
BIP4-KNXs REG	-	90412

Technical data

Voltage:	via KNX BUS
Dimensions:	55 x 18 x 90 mm (1 TE)
Typ. power input:	5 mA
Degree / class of protection:	IP20 / Class III
Ambient temperature:	-5 °C to +45 °C
Housing:	polycarbonate, UV-resistant
Material color:	-
KNX TP 256:	Yes
KNX Secure:	Yes
Connections and wires:	1 x KNX bus terminal black/red 6 x Screw terminals (binary input, max. 30m cable length) 0.34 ... 2.5 mm² rigid 0.34 ... 2.5 mm² fine-wired

Product information

Compact binary input with 4 channels for controlling luminaires, blinds, etc

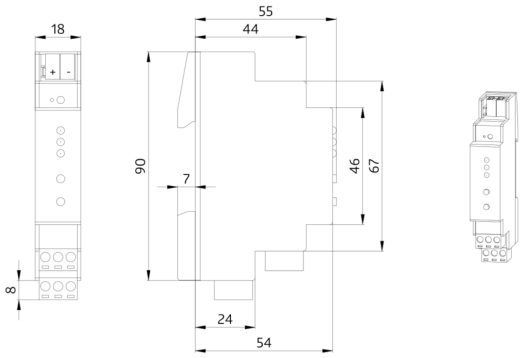
KNX Secure ready

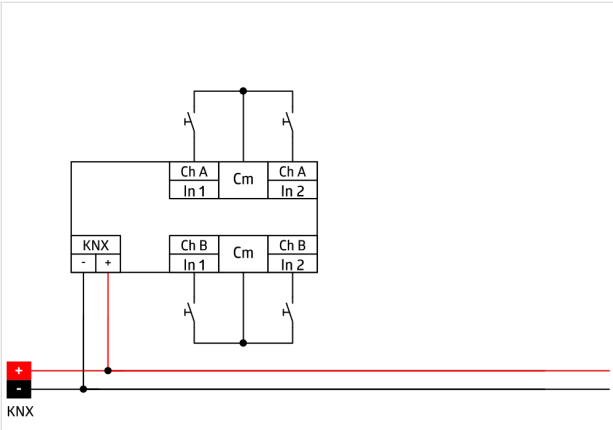
Galvanically isolated inputs for potential-free contacts

Use as a pulse counter is possible

Two push-buttons and three LEDs enable local operation and visualisation of the unit's status

In addition to the input channels, the unit contains 16 independent logic or time functions


18
55
44
90
7
46
67
8
24
54


Ch A
In 1
Cm
Ch A
In 2
KNX
-
+
Ch B
In 1
Cm
Ch B
In 2
+
-
KNX