B.E.G. LUXOMAT® net




# SA4 - 230 / 16 / H / KNXs REG

Prod.No. 93224 EAN: 4007529932245

Switching actuator for switching loads

KNX Secure ready

Industrial quality

## Order data

| Designation | Colour | Art.No |
|---|---|---|
| SA4 - 230 / 16 / H / KNXs REG | - | 93224 |

## Technical data

| | |
|---|---|
| Voltage: | via KNX BUS |
| Dimensions: | 90 x 72 x 64 mm (4 TE) |
| Typ. power input: | 5 mA typical<br>20 mA max. |
| Power consumption: | 0.15 W |
| Degree / class of protection: | IP20 / Class II |
| Ambient temperature: | -5 °C to +45 °C |
| Material color: | - |
| KNX TP 256: | Yes |
| KNX Secure: | Yes |
| Connections and wires: | KNX bus terminal black/red<br>0.2 ... 4.0 mm² rigid<br>0.25 ... 2.5 mm² fine-wired (with or without ferrule) |
| **per channel** | |
| Switching power: | 3680 W, cos φ = 1<br>max. inrush current Ip (150 µs) = 600 A |
| Type of contact (k): | µ-contacts, dry NO contact |
| Outputs: | 4 switching outputs |

## Product information

Switching actuator for switching loads

KNX Secure ready

Industrial quality

KNX rail-mounting device for mounting on a DIN rail (TH 35 according to EN 60715) for installation in the distribution board

4 independent, potential-free normally open contacts

The switching contacts are optimised for capacitive loads

operating hours counter

cycle counter

8 scene functions per channel

Extensive logic functions

Locking functions

safety features

Staircase and flashing function

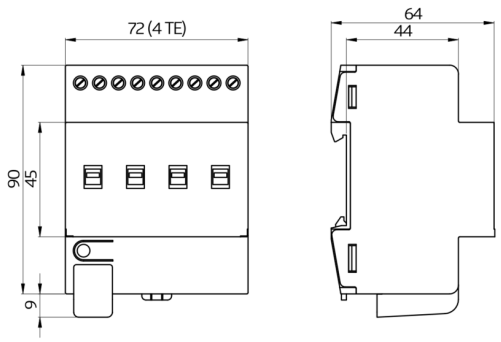
Switch-on and switch-off delays

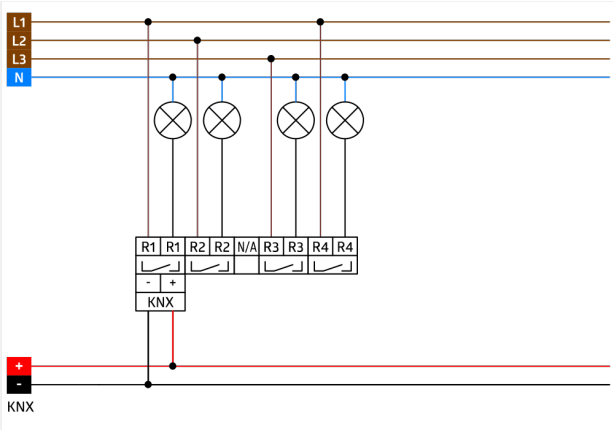
Manual switches for switching without bus tension

Powered via KNX bus

Connection of the outputs via screw terminals

The product database can be downloaded from the B.E.G. homepage or imported directly from the ETS online catalogue


72 (4 TE)
64
44
90
45
9


L1
L2
L3
N
R1
R1
R2
R2
N/A
R3
R3
R4
R4
-
+
KNX
+
-
KNX