B.E.G. LUXOMAT® net



LAN-IF/KNXs REG

Prod.No. 90404 EAN: 4007529904044

Secure Interface Between IP (KNX IP-Secure) and KNX

KNX Secure ready

Can be used as a programming interface accessible via LAN

Order data

Designation	Colour	Art.No
LAN-IF/KNXs REG	-	90404

Technical data

Voltage:	via KNX BUS
Dimensions:	90 x 18 x 60 mm (1 TE)
Typ. power input:	20 mA
Degree / class of protection:	IP20 / Class III
Ambient temperature:	-5 °C to +45 °C
Housing:	polycarbonate, UV-resistant (PC)
Material color:	-
KNX TP 256:	Yes
KNX Secure:	Yes
Connections and wires:	1 x KNX bus terminal black/red, 1 x RJ45 socket (ethernet)

Product information

Secure Interface Between IP (KNX IP-Secure) and KNX

KNX Secure ready

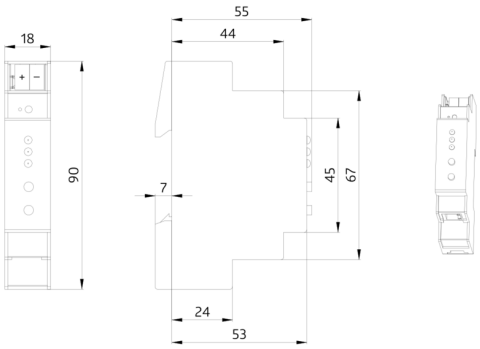
Can be used as a programming interface accessible via LAN

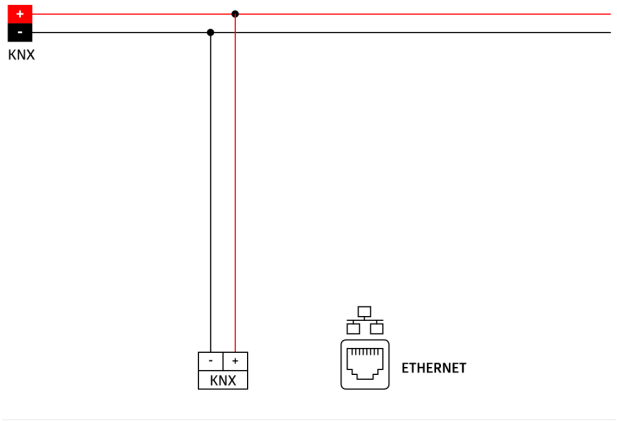
Preventing Unauthorized System Access in Tunneling as a KNX Secure Interface

Up to 8 simultaneous connections are possible via tunneling

Assigning the IP address via a DHCP server or through manual configuration in the ETS

LED indicator for operating states and communication errors


18
90
55
44
7
45
67
24
53


+
-
KNX
-
+
KNX
ETHERNET