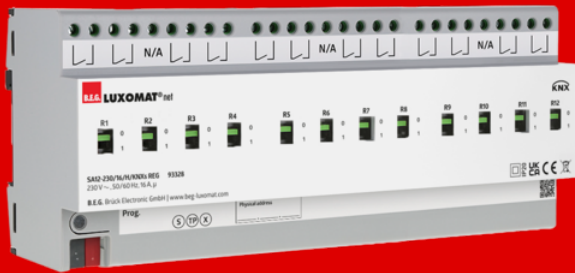


B.E.G.**LUXOMAT[®]net**

SA12 - 230 / 16 / H / KNXs REG

Prod.No. 93328 EAN: 4007529933280

- Voltage: via KNX BUS
- Dimensions: 90 x 216 x 64 mm (12 TE)
- Typ. power input: 5 mA typical
20 mA max.

Order data

Designation	Colour	Art.No
SA12 - 230 / 16 / H / KNXs REG	-	93328

Technical data

Voltage:	via KNX BUS
Dimensions:	90 x 216 x 64 mm (12 TE)
Typ. power input:	5 mA typical 20 mA max.
Power consumption:	0.15 W
Degree / class of protection:	IP20 / Class II
Ambient temperature:	-5 °C to +45 °C
Material color:	-
KNX TP 256:	Yes
KNX Secure:	Yes
Connections and wires:	KNX bus terminal black/red 0.2 ... 4.0 mm ² rigid 0.25 ... 2.5 mm ² fine-wired (with or without ferrule)

per channel

Switching power:	3680 W, $\cos \varphi = 1$ max. inrush current $I_p (150 \mu s) = 600 A$
Type of contact (k):	μ -contacts, dry NO contact
Outputs:	12 switching outputs

Product information

Switching actuator for switching loads

KNX Secure ready

Industrial quality

KNX rail-mounting device for mounting on a DIN rail (TH 35 according to EN 60715) for installation in the distribution board

The device has 12 independant potential-free NO contacts

The switching contacts are optimised for capacitive loads

Manual switches for switching without bus tension

Powered via KNX bus

Connection of the outputs via screw terminals

